


TECHNICAL DATA SHEET

TDA/013 JANUARY 2010

## FT 60 Small Single Fountain Installation Details

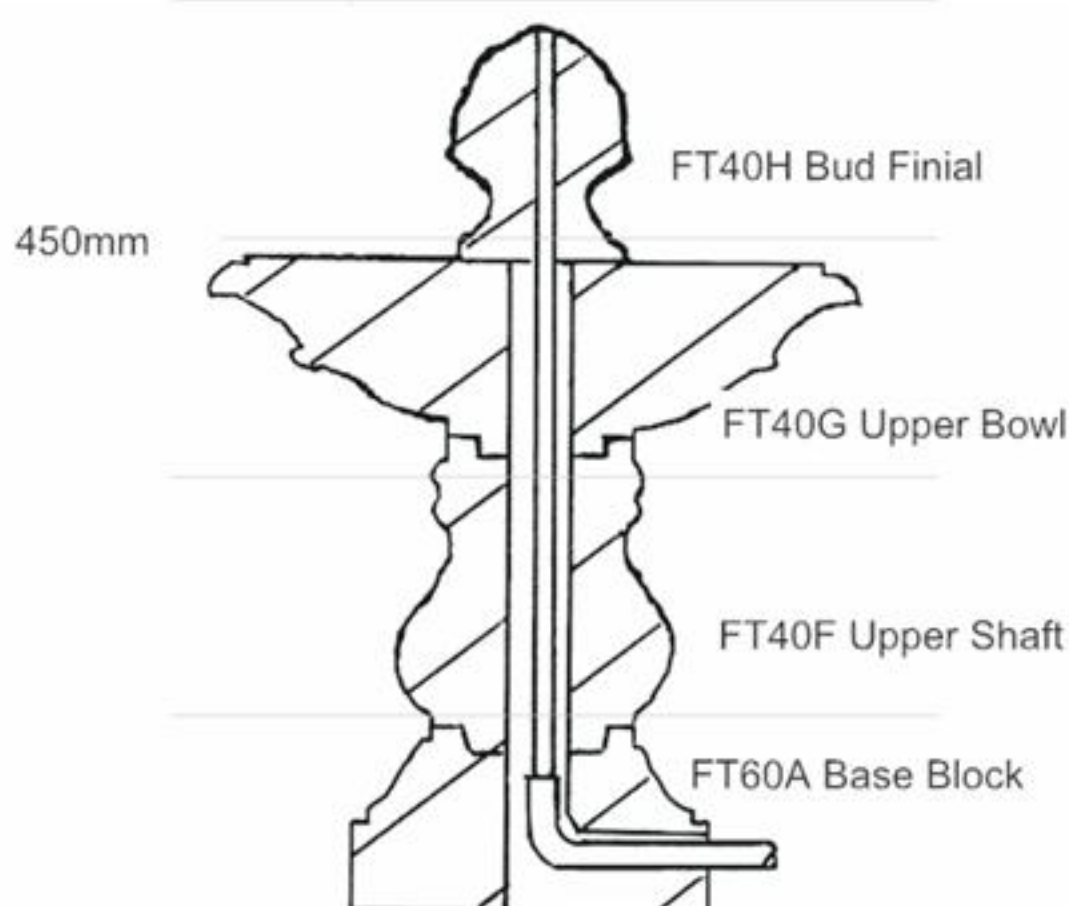

### PLUMBING COMPONENTS LIST

Jubilee clip $\frac{1}{2}$ "	- 2 No
$\frac{1}{2}$ " PVC pipe	- 1m
15mm copper pipe	- 0.75m
Pump	- 1 No
All pipework to be cut on site	

All water to be drained from the water feature at the beginning of November to prevent damage from frost and only refill in spring when the risk of severe frosts has passed.  
 Warm water can be used on PVC pipes to facilitate ease of assembly.

Bedding Joints: Use 1:1:6 cement/lime/sand mortar with a waterproofing agent added.  
 We recommend individual components are fixed together with a polyester or epoxy adhesive.

Pointing: Joints should be pointed with MDL Precast Ltd pointing mix

Allow 6mm for bedding joints.

### PIPEWORK LAYOUT

